


BARFELL TMP II PVC PRESSURE HOSE

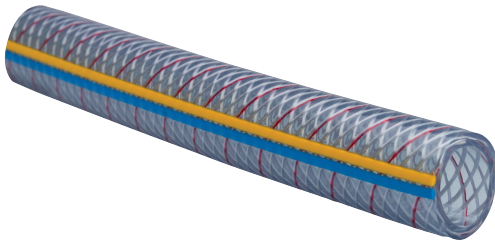

Colour:

Inner wall: Clear
 Outer wall: Clear with Yellow and Blue Stripes

Application:

Suitable for air, water, food and beverage liquids and semi liquids and petroleum based products.


Description:

A Translucent multi purpose food contact hose. It meets AS-2070 1999, with a foodcontact inner and outer covering. The hose is highly flexiblebut kink resistant with a highly distinctive dual striping.

Meets: AS2070 1999, with a food contact inner and outer covering.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A47-006	6	10.2	200	800	0.08	20, 100s, 300r
A47-008	8	12.4	200	800	0.1	20, 100s, 300r
A47-010	10	15	200	800	0.14	20, 80s, 100, 300r
A47-012	12.5	18.1	200	800	0.19	20, 55s, 100, 250r
A47-016	16	22.8	200	800	0.3	20, 100
A47-020	20	27.6	200	800	0.4	20, 100
A47-025	25	33.4	200	800	0.54	20, 100
A47-032	31.5	40.9	175	700	0.97	20, 60
A47-040	38	49.8	175	700	1.32	20, 40
A47-050	50	64.2	131	524	2.12	20, 40

BARFELL PVC NON TOXIC CLEAR PVC PRESSURE HOSE

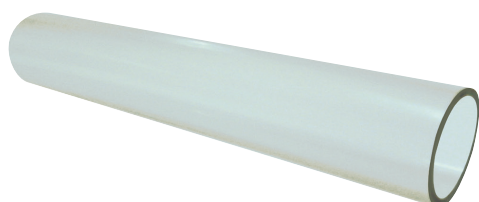

Colour:

Wall Translucent +10 Calfateria Tube

Application:

Suitable for food & beverage fluids, medical drainage and low pressure general delivery lines.

Description:

Non toxic tube manufactured to AS2070 1999 with excellent clarity, flexibility and mirroi smooth bore for low friction flow.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A15-003	3	5	0.9	125	17	30, 300s
A15-004	4	7	0.8	120	35	30
A15-005	5	8	0.8	115	42	30, 100s
A15-006	6	9	0.6	90	48	30, 100s
A15-008	8	11	0.5	75	61	30, 150s
A15-010	10	13	0.4	60	74	30, 130s
A15-010+	10	15	0.6	90	134	30
A15-012	12.5	15.5	0.5	70	90	30, 90s
A15-016	16	19	0.4	60	113	30, 60s
A15-020	19	23	0.4	50	181	30
A15-025	25	31	0.4	50	360	30
A15-032	32	38	0.3	40	452	30
A15-038	38	46	0.3	40	712	30
A15-050	50	60	0.3	40	1,165	15

BARFELL ESTATE BLULINE

PVC PRESSURE HOSE



Colour:

Inner wall: Black
Outer wall: Smooth White with Blue Stripes

Application:

All commercial parks, gardens and turf watering applications. Ideal as a general cold water wash down hose in cattle yards and dairies.

Description:

Highly flexible premium hose for watering parks and gardens. With high visibility and two distinctive blue stripes, it is kink, burst and UV light resistant.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A55-012	12.5	19	145	580	0.22	20, 100
A55-020	19	26.5	145	580	0.4	20, 30, 100
A55-025	25	34	145	580	0.58	20, 30, 100
A55-032	31.5	42	145	580	0.85	20, 30, 100
A55-038	38	49.5	145	580	1.11	20, 30, 60

BARFELL HOT WASH WHITE

PVC PRESSURE HOSE



Colour:

Inner wall: White
Outer wall: White with smooth TPR surface

Rated to 85°C when used at low pressure.

Application:

Hot washdown of all food preparation and retail areas, where milk, fats and other food products are present.


Description:

Highest grade hose for hot washdown use in the food industry. The thermoplastic rubber smooth outer cover is highly resistant to lactic acid and fats.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A08-012	12.5	19.7	290	1,160	0.28	20, 100
A08-020	19	28	250	1,000	0.48	20, 100

B20 - PVC BLUE / CLEAR FDA SUCTION HOSE

MEDIUM DUTY, FLEXIBLE FOOD GRADE PVC SUCTION HOSE

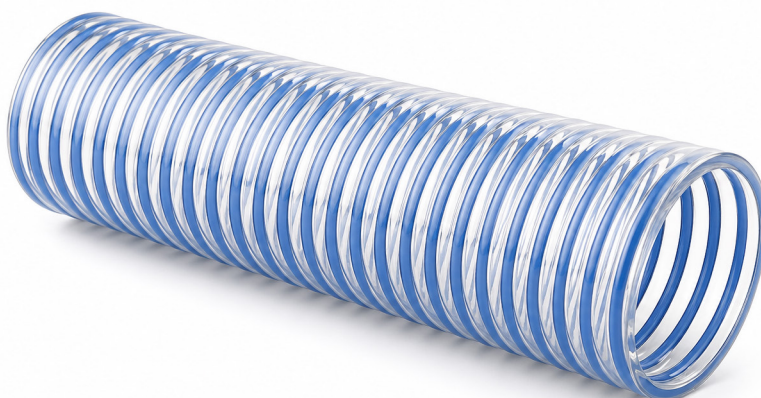

Overview

A medium duty, flexible food grade PVC suction and discharge hose reinforced with a rigid PVC spiral.

Designed with a mirror-smooth bore to allow easy cleaning and minimise friction loss, making it ideal for hygienic transfer applications.

Manufactured using materials that comply with AS2070 and FDA requirements for food contact, and tested to European Standard 2002/72/EC, including plasticiser migration compliance.

Construction

Tube: Food grade PVC (smooth bore)

Reinforcement: Rigid PVC spiral

Cover: Clear PVC

Key Features

- Smooth internal bore for reduced friction loss
- Lightweight and highly flexible
- Excellent hygiene and easy cleaning
- Suitable for food-grade applications
- Good chemical resistance
- Good abrasion resistance

Additional Information

Colour: Clear with light blue rigid spiral

Temperature Range: -5°C to +60°C

Flexibility: Excellent

Chemical Resistance: Good

Abrasion Resistance: Good

Applications


Suitable for the transfer of most food grade products where FDA-compliant materials are required.

Also suitable as a general-purpose medium duty suction and delivery hose.

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	O.D. (in)	Working Pressure (psi)	Working Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B20-020	19.3	3/4	24.9	0.98	100	6.9	55	0.24	20,40
B20-025	25.2	1	31	1.22	100	6.9	75	0.37	20,40
B20-032	31.8	1¼	37.8	1.49	100	6.9	100	0.44	20,40
B20-038	38.4	1½	45.2	1.78	85	5.9	140	0.56	20,40
B20-050	50.8	2	58.8	2.31	70	4.8	200	0.85	20,40
B20-065	63.7	2½	72.3	2.85	70	4.8	240	1.176	20
B20-075	76	3	85.6	3.37	55	3.8	350	1.42	20
B20-100	102.2	4	114.2	4.5	55	3.8	400	2.52	20

B28 - PVC RED / CLEAR WINE PVC SUCTION HOSE

HEAVY-DUTY, FLEXIBLE FOOD-GRADE PVC SUCTION HOSE

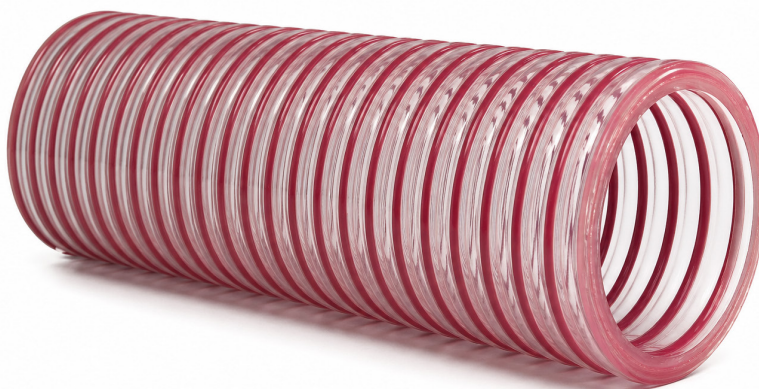

Description

Heavy-duty, flexible food-grade PVC suction and discharge hose, reinforced with a rigid spiral. Designed with a smooth bore to minimise flow loss and improve hygiene.

UV light resistant for extended outdoor use.

Applications

Suitable for wine transfer, canning, and food packaging industries.

Ideal for suction and delivery of wine and spirits up to 28½ proof.

Smooth internal surface supports easy cleaning and reduces bacteria build-up.

Construction

Tube: Food-grade PVC (smooth bore)

Reinforcement: Rigid PVC spiral

Cover: Clear PVC with claret spiral

Key Features

- Smooth bore for minimal friction loss
- Excellent chemical resistance
- Excellent abrasion resistance
- UV resistant
- Good flexibility
- Hygienic design for food-grade applications

Compliance

Conforms to:

- Australian Standard AS2070
- European Standard EU 2002/72-EC
- Certified phenol free

Colour

Clear with claret spiral

Temperature Range

-5°C to +60°C

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	O.D. (in)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure (psi)	Burst Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B28-025	25.2	1	34	1.34	100	6.9	300	21	160	0.6	20
B28-032	31.8	1¼	41	1.61	100	6.9	300	21	190	0.71	20
B28-038	38.4	1½	48	1.89	85	5.8	255	18	230	0.82	20
B28-050	50.8	2	62	2.44	75	5.17	225	15	290	1.2	20
B28-063	63.7	2½	76	2.99	75	5.17	225	15	360	1.7	20
B28-075	76	3	90	3.54	75	5.17	225	15	450	2.29	20

CLEAR SPRING PVC SUCTION

PVC SUCTION



Construction:

High tensile carbon steel wire encapsulated in transparent non-toxic flexible PVC. Both layers of PVC are manufactured from FDA approved ingredients and is suitable for food contact applications. .

Temperature Range:

-5°C to +55°C

Application:

Suitable for the suction and delivery of water, slurries, granules and dilute chemicals. Springflex- is ideally suited to applications in the agricultural, food processing, plastics handling, marine & construction industries. Springflex- is UV compounded to resist atmospheric conditions and is ideal W suited to external applications.

Description:

Springflex- is an extremely tough and flexible non toxic transparent PVC hose, allowing easy identification of blockages. UV compounded to maintain clarity. Excellent resistance to pressure. vacuum, abrasion and accidental crushing with accurate pitch and placement of high tensile carbon steel helix preventing bulging and bursting. Highly flexible over a wide temperature range. Smooth bore reduces flow loss.

Product Code	I.D. (in)	I.D. (mm)	O.D. (mm)	Wall Thickness (mm)	Working Pressure (bar)	Vacuum (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B22-012	1/2	13.0	19.2	3.1	12.0	9	26	0.21	30
B22-016	5/8	16.0	22.2	3.1	10.5	9	32	0.25	30
B22-020	3/4	19.0	26.0	3.5	11.0	9	38	0.33	30
B22-025	1	25.0	33.0	4.0	10.0	9	50	0.52	30
B22-032	1¼	32.0	40.2	4.1	9.0	9	80	0.66	30
B22-038	1½	38.0	47.0	4.5	9.0	9	95	0.80	30
B22-050	2	51.0	61.8	5.4	7.0	9	128	1.30	30
B22-063	2½	63.0	74.0	5.5	6.0	9	158	1.80	30
B22-075	3	76.0	89.6	6.8	4.7	9	190	2.30	30
B22-100	4	102.0	118.0	8.0	3.0	9	255	3.70	30
B22-150	6	152.0	170.4	9.2	2.5	9	456	6.90	20

B24 - CLEAR SPRING BRAIDED PVC DELIVERY & SUCTION HOSE

PVC SUCTION AND DELIVERY APPLICATIONS



Overview

B24 is a high-performance, non-toxic, clear PVC hose designed for both suction and delivery applications.

Built with a combination of steel spiral reinforcement and polyester braid, it delivers exceptional strength, flexibility, and durability while maintaining a smooth bore for efficient flow.

Key Features

- Very high working pressure capability
- Excellent vacuum performance
- Manufactured from two layers of food-grade PVC
- Reinforced with high tensile steel spiral for superior kink and crush resistance
- Tough, highly flexible and extremely durable construction
- Outstanding resistance to weathering and environmental conditions
- Smooth bore for minimal frictional loss
- Excellent chemical resistance

Construction

Tube & Cover:

- Two layers of food quality PVC

Reinforcement:

- High tensile carbon steel wire spiral
- High tensile polyester fibre braid

Finish:

- Smooth internal wall for optimal flow

Colour

- Clear with black stripe

Temperature Range

- -10°C to +60°C

Applications

- Food processing and transfer
- Beverage and spirits transfer (up to 28% aromatic concentration)
- General industrial suction and delivery duties

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure (psi)	Burst Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B24-020	19	3/4	28	290	20	739	51	40	0.7	30
B24-025	25	1	36.9	261	18	647	46.5	60	1.2	30
B24-038	38	1½	50	203	14	522	36	100	1.8	30
B24-050	51	2	65	174	12	435	30	130	2.8	30