


BARFELL TMP II PVC PRESSURE HOSE

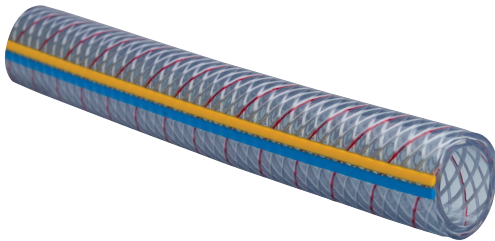

Colour:

Inner wall: Clear
Outer wall: Clear with Yellow and Blue Stripes

Application:

Suitable for air, water, food and beverage liquids and semi liquids and petroleum based products.


Description:

A Translucent multi purpose food contact hose. It meets AS-2070 1999, with a foodcontact inner and outer covering. The hose is highly flexiblebut kink resistant with a highly distinctive dual striping.

Meets: AS2070 1999, with a food contact inner and outer covering.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A47-006	6	10.2	200	800	0.08	20, 100s, 300r
A47-008	8	12.4	200	800	0.1	20, 100s, 300r
A47-010	10	15	200	800	0.14	20, 80s, 100, 300r
A47-012	12.5	18.1	200	800	0.19	20, 55s, 100, 250r
A47-016	16	22.8	200	800	0.3	20, 100
A47-020	20	27.6	200	800	0.4	20, 100
A47-025	25	33.4	200	800	0.54	20, 100
A47-032	31.5	40.9	175	700	0.97	20, 60
A47-040	38	49.8	175	700	1.32	20, 40
A47-050	50	64.2	131	524	2.12	20, 40

BARFELL PVC NON TOXIC CLEAR PVC PRESSURE HOSE

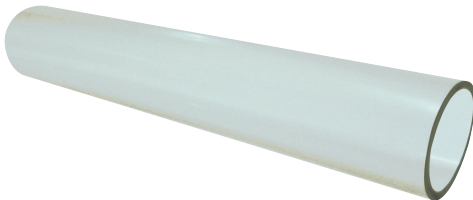

Colour:

Wall Translucent +10 Calfateria Tube

Application:

Suitable for food & beverage fluids, medical drainage and low pressure general delivery lines.

Description:

Non toxic tube manufactured to AS2070 1999 with excellent clarity, flexibility and mirroi smooth bore for low friction flow.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A15-003	3	5	0.9	125	17	30, 300s
A15-004	4	7	0.8	120	35	30
A15-005	5	8	0.8	115	42	30, 100s
A15-006	6	9	0.6	90	48	30, 100s
A15-008	8	11	0.5	75	61	30, 150s
A15-010	10	13	0.4	60	74	30, 130s
A15-010+	10	15	0.6	90	134	30
A15-012	12.5	15.5	0.5	70	90	30, 90s
A15-016	16	19	0.4	60	113	30, 60s
A15-020	19	23	0.4	50	181	30
A15-025	25	31	0.4	50	360	30
A15-032	32	38	0.3	40	452	30
A15-038	38	46	0.3	40	712	30
A15-050	50	60	0.3	40	1,165	15

BARFELL SUPER ULTRAFLEX PVC PRESSURE HOSE



Colour:

Inner Wall: Black
Outer Wall: Yellow with Blue Stripe

Application:

Suitable for general purpose air & water supply. Also suitable for the conveyance of liquids, gases and many chemicals. Ideal for high pressure air lines and compressors. properties, when comparing to a standard smooth cover hose.

Description:

General purpose air and water hose with a highly distinctive yellow & blue stripes, optimum flexibility, resilience & kink resistance.

Exceed: AS/NZ2554 Class B for burst pressure, wall thickness, abrasion resistance, weathering resistance, low temperature.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A53-006	6	12.8	290	1,160	0.13	20, 100s, 300r
A53-008	8	14.8	290	1,160	0.16	20, 100s, 300r
A53-010	10	16.6	290	1,160	0.17	20, 30, 80s, 100, 300r
A53-012	12.5	19.3	290	1,160	0.19	20, 55s, 100, 250r
A53-020	20	29	230	920	0.45	20, 100
A53-025	25	34.6	230	920	0.62	20, 100
A53-032	31.5	42.9	230	920	1.15	20, 60
A53-038	38	50.6	230	920	1.56	20, 40
A53-050	50	63	230	920	2.4	20, 40

BARFELL ESTATE BLULINE

PVC PRESSURE HOSE



Colour:

Inner wall: Black
Outer wall: Smooth White with Blue Stripes

Application:

All commercial parks, gardens and turf watering applications. Ideal as a general cold water wash down hose in cattle yards and dairies.

Description:

Highly flexible premium hose for watering parks and gardens. With high visibility and two distinctive blue stripes, it is kink, burst and UV light resistant.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A55-012	12.5	19	145	580	0.22	20, 100
A55-020	19	26.5	145	580	0.4	20, 30, 100
A55-025	25	34	145	580	0.58	20, 30, 100
A55-032	31.5	42	145	580	0.85	20, 30, 100
A55-038	38	49.5	145	580	1.11	20, 30, 60

BARFELL HOT WASH WHITE

PVC PRESSURE HOSE



Colour:

Inner wall: White
Outer wall: White with smooth TPR surface

Rated to 85°C when used at low pressure.

Application:

Hot washdown of all food preparation and retail areas, where milk, fats and other food products are present.


Description:

Highest grade hose for hot washdown use in the food industry. The thermoplastic rubber smooth outer cover is highly resistant to lactic acid and fats.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A08-012	12.5	19.7	290	1,160	0.28	20, 100
A08-020	19	28	250	1,000	0.48	20, 100

BARFELL FIRE REEL HOSE BLACK

PVC PRESSURE HOSE

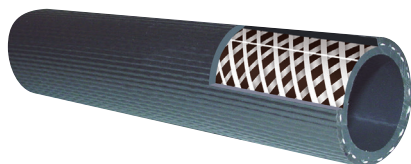

Colour:

Inner wall: Black
Outer wall: Ribbed Black

Manufactured to AS/NZ122

Application:

Stationary or mobile hose reels in fire control systems located in commercial or public buildings. Also an excellent general purpose water delivery hose.

Description:

The hose is lightweight, flexible, resistant to UV light and has self extinguishing properties.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A09-020	19	26	145	580	0.36	20, 30, 36, 50, 100
A09-025	25	32	145	580	0.55	20, 30, 36, 100

BARFELL DIVERS AIR BREATHER

PVC PRESSURE HOSE



Colour:

Inner wall: White
Outer wall: Smooth Yellow

Manufactured to AS2299 and AS/NZ1716.

Application:

Diving, air breathing applications.

Description:

Approved braided divers air breathing hose for professional and sports diving. Also suitable for breathing apparatus for spray booths and sand blasting. Conforms to AS2299 and AS/NZ1716. Outer cover pricked for added safety. Extremely low odor inner tube.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A10-008	8	14.3	235	940	0.14	50, 100, 300r
A10-010	10	17.2	365	1,460	0.22	50, 100, 300r

BARFELL FRAS PVC PRESSURE HOSE



Colour:

Inner wall: Black
 Outer wall: Ribbed Yellow with Black Stripe.

Application:

Underground air and water mining hose.

Description:

Fire resistant anti static hose with unique 3 layer construction that offers optimum performance and handling characteristics.

Manufactured to AS2660 Class A (1991) and AS/NZ2554 Class A.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @ 20°C (psi)	Burst Pressure @ 20°C (psi)	Weight (kg/m)	Roll Length (mt)
A40-010	10	18	305	1,200	0.25	20, 100
A40-012	12.5	20.9	305	1,200	0.26	20, 30, 100
A40-020	20	29.4	305	1,200	0.58	20, 30, 100
A40-025	25	34.8	305	1,200	0.71	20, 30, 100
A40-038	38	48.8	305	1,200	1.19	20, 150, 200
A40-050	50	62.4	305	1,200	1.8	20, 100, 200

BARFELL BLUELINE OIL & TANKER PVC SUCTION HOSE



Colour:

Blue.

Temperature Range:

-5°C to +60°C

Application:

Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Description:

Medium duty flexible PVC suction/ discharge hose. Good resistance to chemicals and oil. Highly at low temperatures and a mirror smooth bore for pumping efficiency.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @20°C (psi)	Vacuum Rating @20°C (KPa)	Weight (kg/m)	Roll Length (mt)
B03-025	25.2	32	145	-90	0.45	50
B03-032	31.8	39	130	-90	0.54	50
B03-038	38.4	46.2	130	-90	0.7	50
B03-050	50.8	60	102	-90	1.07	20, 50
B03-065	63.7	74.1	87	-90	1.5	50
B03-075	76	89	87	-90	2.25	30
B03-100	102.2	116	72	-90	3.04	30

BARFELL TIGER TAIL PETROL & OIL PVC SUCTION HOSE



Colour:

Black with exposed yellow spiral.

Temperature Range:

-5°C to +60°C

Application:


Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Description:

An extremely flexible suction/ discharge hose with a hard wearing exposed rigid PVC spiral. Excellent chemical resistance, making the hose suitable for diesel fuels, petrol, oils, sewage and chemicals.

Product Code	I.D. (mm)	O.D. (mm)	Working Pressure @20°C (psi)	Vacuum Rating @20°C (KPa)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B04-050	50.8	61	45	-80	220	0.88	30
B04-065	63.7	77	45	-80	270	1.27	30
B04-075	76	91	45	-80	350	1.62	30
B04-100	102	118	45	-80	450	2.43	30
B04-150	150	172	45	-80	500	5.1	20

B06 - PVC GREY / CANDY RED EXTRA FLEXIBLE SUCTION HOSE GREY HD - GENERAL PURPOSE

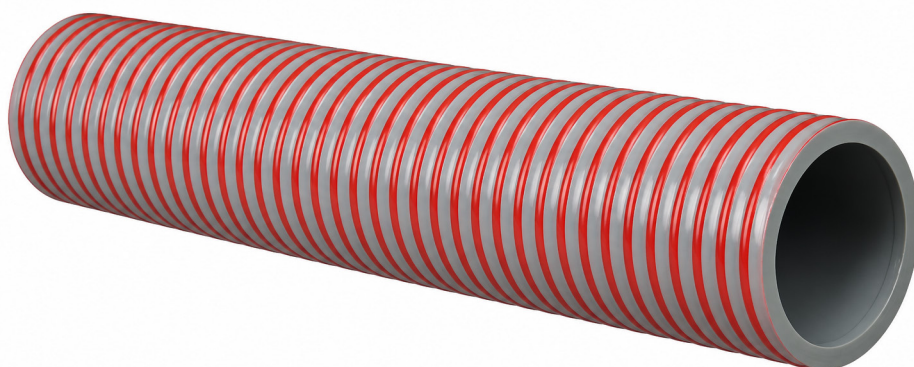

Applications

Suitable for transfer of:

- Water
- Concrete
- Slurry
- Waste matter (non-petrochemical)
- Sand and general-purpose fluids

Construction

Tube: Smooth PVC (mirror finish)

Reinforcement: Rigid PVC spiral

Cover: Opaque grey PVC with candy red spiral

Key Features

- Excellent flexibility for easy handling
- Smooth internal bore reduces pressure loss
- Strong spiral reinforcement prevents collapse under vacuum
- Durable and abrasion resistant outer
- Suitable for a wide range of general-purpose applications

Additional Information

Colour: Opaque grey with red spiral

Temperature Range: -5°C to +60°C

Chemical Resistance: Suitable for some applications

Weather Resistance: Good


Abrasion Resistance: Good

Flexibility: Excellent

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	O.D. (in)	Working Pressure (psi)	Working Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B06-025	25.2	1	31.4	1.24	100	6.9	90	0.35	20
B06-032	31.8	1¼	38.6	1.52	100	6.9	120	0.49	20
B06-038	38.4	1½	45.6	1.8	85	5.9	150	0.6	20
B06-050	50.8	2	59.6	2.35	70	4.8	200	1	20
B06-065	63.7	2½	73.3	2.89	70	4.8	250	1.27	20
B06-075	76	3	88	3.46	55	3.8	330	2.02	20
B06-100	102.2	4	116	4.57	55	3.8	470	2.98	20

B20 - PVC BLUE / CLEAR FDA SUCTION HOSE

MEDIUM DUTY, FLEXIBLE FOOD GRADE PVC SUCTION HOSE

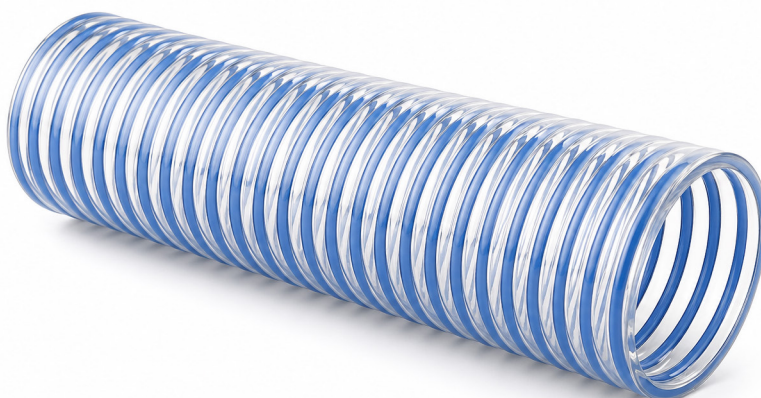

Overview

A medium duty, flexible food grade PVC suction and discharge hose reinforced with a rigid PVC spiral.

Designed with a mirror-smooth bore to allow easy cleaning and minimise friction loss, making it ideal for hygienic transfer applications.

Manufactured using materials that comply with AS2070 and FDA requirements for food contact, and tested to European Standard 2002/72/EC, including plasticiser migration compliance.

Construction

Tube: Food grade PVC (smooth bore)

Reinforcement: Rigid PVC spiral

Cover: Clear PVC

Key Features

- Smooth internal bore for reduced friction loss
- Lightweight and highly flexible
- Excellent hygiene and easy cleaning
- Suitable for food-grade applications
- Good chemical resistance
- Good abrasion resistance

Additional Information

Colour: Clear with light blue rigid spiral

Temperature Range: -5°C to +60°C

Flexibility: Excellent

Chemical Resistance: Good

Abrasion Resistance: Good

Applications


Suitable for the transfer of most food grade products where FDA-compliant materials are required.

Also suitable as a general-purpose medium duty suction and delivery hose.

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	O.D. (in)	Working Pressure (psi)	Working Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B20-020	19.3	3/4	24.9	0.98	100	6.9	55	0.24	20,40
B20-025	25.2	1	31	1.22	100	6.9	75	0.37	20,40
B20-032	31.8	1¼	37.8	1.49	100	6.9	100	0.44	20,40
B20-038	38.4	1½	45.2	1.78	85	5.9	140	0.56	20,40
B20-050	50.8	2	58.8	2.31	70	4.8	200	0.85	20,40
B20-065	63.7	2½	72.3	2.85	70	4.8	240	1.176	20
B20-075	76	3	85.6	3.37	55	3.8	350	1.42	20
B20-100	102.2	4	114.2	4.5	55	3.8	400	2.52	20

B28 - PVC RED / CLEAR WINE PVC SUCTION HOSE

HEAVY-DUTY, FLEXIBLE FOOD-GRADE PVC SUCTION HOSE

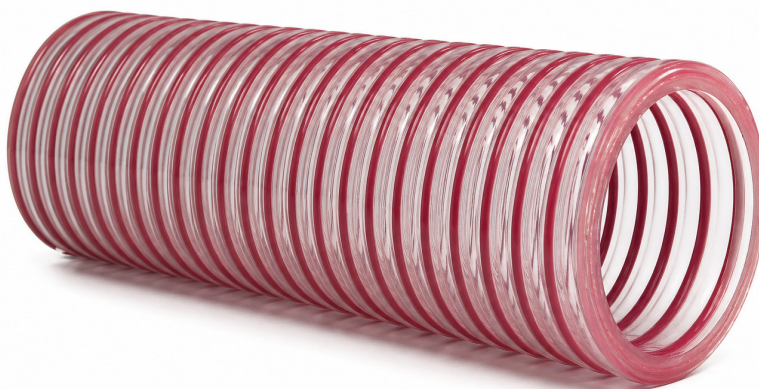

Description

Heavy-duty, flexible food-grade PVC suction and discharge hose, reinforced with a rigid spiral. Designed with a smooth bore to minimise flow loss and improve hygiene.

UV light resistant for extended outdoor use.

Applications

Suitable for wine transfer, canning, and food packaging industries.

Ideal for suction and delivery of wine and spirits up to 28½ proof.

Smooth internal surface supports easy cleaning and reduces bacteria build-up.

Construction

Tube: Food-grade PVC (smooth bore)

Reinforcement: Rigid PVC spiral

Cover: Clear PVC with claret spiral

Key Features

- Smooth bore for minimal friction loss
- Excellent chemical resistance
- Excellent abrasion resistance
- UV resistant
- Good flexibility
- Hygienic design for food-grade applications

Compliance

Conforms to:

- Australian Standard AS2070
- European Standard EU 2002/72-EC
- Certified phenol free

Colour

Clear with claret spiral

Temperature Range

-5°C to +60°C

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	O.D. (in)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure (psi)	Burst Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B28-025	25.2	1	34	1.34	100	6.9	300	21	160	0.6	20
B28-032	31.8	1¼	41	1.61	100	6.9	300	21	190	0.71	20
B28-038	38.4	1½	48	1.89	85	5.8	255	18	230	0.82	20
B28-050	50.8	2	62	2.44	75	5.17	225	15	290	1.2	20
B28-063	63.7	2½	76	2.99	75	5.17	225	15	360	1.7	20
B28-075	76	3	90	3.54	75	5.17	225	15	450	2.29	20

CLEAR SPRING PVC SUCTION PVC SUCTION



Construction:

High tensile carbon steel wire encapsulated in transparent non-toxic flexible PVC. Both layers of PVC are manufactured from FDA approved ingredients and is suitable for food contact applications. .

Temperature Range:

-5°C to +55°C

Application:

Suitable for the suction and delivery of water, slurries, granules and dilute chemicals. Springflex- is ideally suited to applications in the agricultural, food processing, plastics handling, marine & construction industries. Springflex- is UV compounded to resist atmospheric conditions and is ideal W suited to external applications.

Description:

Springflex- is an extremely tough and flexible non toxic transparent PVC hose, allowing easy identification of blockages. UV compounded to maintain clarity. Excellent resistance to pressure. vacuum, abrasion and accidental crushing with accurate pitch and placement of high tensile carbon steel helix preventing bulging and bursting. Highly flexible over a wide temperature range. Smooth bore reduces flow loss.

Product Code	I.D. (in)	I.D. (mm)	O.D. (mm)	Wall Thickness (mm)	Working Pressure (bar)	Vacuum (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B22-012	1/2	13.0	19.2	3.1	12.0	9	26	0.21	30
B22-016	5/8	16.0	22.2	3.1	10.5	9	32	0.25	30
B22-020	3/4	19.0	26.0	3.5	11.0	9	38	0.33	30
B22-025	1	25.0	33.0	4.0	10.0	9	50	0.52	30
B22-032	1¼	32.0	40.2	4.1	9.0	9	80	0.66	30
B22-038	1½	38.0	47.0	4.5	9.0	9	95	0.80	30
B22-050	2	51.0	61.8	5.4	7.0	9	128	1.30	30
B22-063	2½	63.0	74.0	5.5	6.0	9	158	1.80	30
B22-075	3	76.0	89.6	6.8	4.7	9	190	2.30	30
B22-100	4	102.0	118.0	8.0	3.0	9	255	3.70	30
B22-150	6	152.0	170.4	9.2	2.5	9	456	6.90	20

B24 - CLEAR SPRING BRAIDED PVC DELIVERY & SUCTION HOSE

PVC SUCTION AND DELIVERY APPLICATIONS



Overview

B24 is a high-performance, non-toxic, clear PVC hose designed for both suction and delivery applications.

Built with a combination of steel spiral reinforcement and polyester braid, it delivers exceptional strength, flexibility, and durability while maintaining a smooth bore for efficient flow.

Key Features

- Very high working pressure capability
- Excellent vacuum performance
- Manufactured from two layers of food-grade PVC
- Reinforced with high tensile steel spiral for superior kink and crush resistance
- Tough, highly flexible and extremely durable construction
- Outstanding resistance to weathering and environmental conditions
- Smooth bore for minimal frictional loss
- Excellent chemical resistance

Construction

Tube & Cover:

- Two layers of food quality PVC

Reinforcement:

- High tensile carbon steel wire spiral
- High tensile polyester fibre braid

Finish:

- Smooth internal wall for optimal flow

Colour

- Clear with black stripe

Temperature Range

- -10°C to +60°C

Applications

- Food processing and transfer
- Beverage and spirits transfer (up to 28% aromatic concentration)
- General industrial suction and delivery duties

Product Code	I.D. (mm)	I.D. (in)	O.D. (mm)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure (psi)	Burst Pressure (bar)	Bend Radius (mm)	Weight (kg/m)	Roll Length (mt)
B24-020	19	3/4	28	290	20	739	51	40	0.7	30
B24-025	25	1	36.9	261	18	647	46.5	60	1.2	30
B24-038	38	1½	50	203	14	522	36	100	1.8	30
B24-050	51	2	65	174	12	435	30	130	2.8	30