


Water Suction

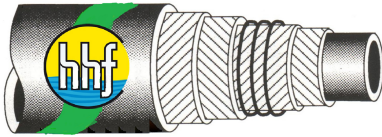

Recommended Usages:
Slurry, Muddy Water, Drain Water

Cover:

Blended SBR

Reinforcement:

High Tensile Nylon Plies with Wire Steel Helix

Tube:

Blended SBR


Temperature Range:

-15° to 70° C

***Available in Corrugated**

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M44-020 | 19 | 29 | 145 | 0.76 | 20 |
| M44-025 | 25 | 36 | 145 | 0.95 | 20 |
| M44-032 | 32 | 43 | 145 | 1.05 | 20 |
| M44-038 | 38 | 48 | 145 | 1.30 | 20 |
| M44-050 | 51 | 63 | 145 | 1.92 | 20 |
| M44-065 | 63 | 77 | 145 | 2.55 | 20 |
| M44-075* | 76 | 90 | 145 | 3.10 | 20 |
| M44-100* | 102 | 118 | 145 | 4.39 | 20 |
| M44-125 | 127 | 146 | 145 | 6.98 | 12 |
| M44-150* | 152 | 170 | 145 | 8.99 | 12 |
| M44-200 | 204 | 223 | 145 | 13.61 | 6 |
| M44-250 | 254 | 282 | 145 | 19.74 | 6 |
| M44-300 | 305 | 335 | 145 | 24.41 | 6 |

Water Delivery

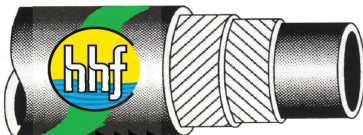

Recommended Usages:
Slurry, Muddy Water, Drain Water

Cover:

Blended SBR

Reinforcement:

High Tensile Nylon Plies

Tube:


Blended SBR

Temperature Range:

-15° to 70° C

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M04-020 | 19 | 28 | 145 | 0.50 | 20 |
| M04-025 | 25 | 34 | 145 | 0.61 | 20 |
| M04-032 | 32 | 42 | 145 | 0.85 | 20 |
| M04-038 | 38 | 48 | 145 | 0.99 | 20 |
| M04-050 | 51 | 61 | 145 | 1.39 | 20 |
| M04-065 | 63 | 74 | 145 | 1.60 | 20 |
| M04-075 | 76 | 89 | 145 | 2.40 | 20 |
| M04-100 | 102 | 114 | 145 | 3.10 | 20 |
| M04-125 | 127 | 140 | 145 | 4.20 | 20 |
| M04-150 | 152 | 165 | 145 | 5.00 | 20 |
| M04-200 | 204 | 214 | 145 | 7.00 | 20 |
| M04-250 | 254 | 270 | 145 | 9.00 | 12 |
| M04-300 | 305 | 323 | 145 | 13.20 | 12 |

Oil Suction

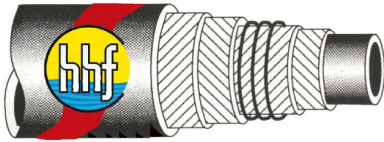

Recommended Usages:

Suction & delivery of petroleum products

Cover:

Oil resistant Nitrile

Reinforcement:

High Tensile Nylon Plies with Wire Steel Helix

Tube:

Nitrile

Temperature Range:

-20° to 75° C

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M28-020 | 19 | 29 | 145 | | 20 |
| M28-025 | 25 | 35 | 145 | 0.84 | 20 |
| M28-032 | 32 | 42 | 145 | 0.99 | 20 |
| M28-040 | 38 | 48 | 145 | 1.16 | 20 |
| M28-044 | 44 | 56 | 145 | 1.35 | 20 |
| M28-050 | 50 | 61 | 145 | 1.48 | 20 |
| M28-057 | 57 | 70 | 145 | 1.80 | 20 |
| M28-065 | 63.5 | 77 | 145 | 2.45 | 20 |
| M28-075 | 76 | 88 | 145 | 2.60 | 20 |
| M28-090 | 90 | 105 | 145 | 2.45 | 20 |
| M28-100 | 100 | 116 | 145 | 4.15 | 20 |

Oil Delivery



Recommended Usages:

Transfer of oil & petroleum based products

Cover:

Oil resistant Nitrile

Reinforcement:

High Tensile Nylon Plies

Tube:


Nitrile

Temperature Range:

-25° to 75° C

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M27-020 | 19 | 28 | 145 | | 20 |
| M27-025 | 25 | 34 | 145 | 0.56 | 20 |
| M27-032 | 32 | 42 | 145 | 0.67 | 20 |
| M27-040 | 38 | 48 | 145 | 0.79 | 20 |
| M27-044 | 44 | 54 | 145 | 1.02 | 20 |
| M27-050 | 50 | 61 | 145 | 1.35 | 20 |
| M27-057 | 57 | 68 | 145 | 1.60 | 20 |
| M27-065 | 63 | 74 | 145 | 1.80 | 20 |
| M27-075 | 76 | 88 | 145 | 1.97 | 20 |
| M27-090 | 90 | 104 | 145 | 2.20 | 20 |
| M27-100 | 102 | 114 | 145 | 2.50 | 20 |

20Bar Air

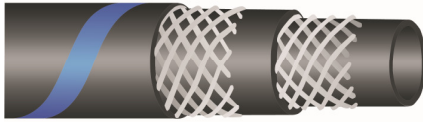

Recommended Usages:
Air

Cover:
NR/EPDM

Reinforcement:
Synthetic Plies

Tube:
NR/NBR

Temperature Range:
-20° to 70° C

Safety 3:1

| Product Code | I.D. mm | O.D. mm | W.P PSI | Coil/ MT |
|--------------|---------|---------|---------|----------|
| M22-020 | 19 | 29 | 300 | 20 |
| M22-025 | 25 | 35 | 300 | 20 |
| M22-032 | 32 | 44 | 300 | 20 |
| M22-038 | 38 | 50 | 300 | 20 |
| M22-050 | 50 | 67 | 300 | 20 |
| M22-075 | 76 | 91 | 300 | 20 |
| M22-100 | 102 | 118 | 300 | 20 |

UHMWPE - Chemical

Ultra High Molecular Weight Polyethylene



Recommended Usages:
80% Most common chemicals, liquids, solvents .

Cover:
Oil + Chemical resistant
Synthetic Rubber

Reinforcement:
High Tensile Nylon Plies with
Wire Steel Helix

Tube:
Ultra High Molecular Weight
Polyethylene

Temperature Range:
-10° to 65° C

| Product Code | I.D. mm | O.D. mm | W.P PSI | Coil/ MT |
|--------------|---------|---------|---------|----------|
| H10-020 | 19 | 31 | 240 | 20 / 60 |
| H10-025 | 25 | 37 | 240 | 20 / 60 |
| H10-032 | 32 | 44 | 240 | 20 / 60 |
| H10-038 | 38 | 51 | 240 | 20 / 60 |
| H10-050 | 51 | 67 | 240 | 20 / 60 |
| H10-065 | 63 | 80 | 240 | 20 / 60 |
| H10-075 | 76 | 92 | 240 | 20 / 60 |
| H10-100 | 102 | 122 | 240 | 20 / 60 |

Mako Marine Exhaust



SPECIALLY DESIGNED FOR THE MARINE INDUSTRY

For conveying wet exhaust fumes.

Lloyds approved.

Light weight corrugated construction gives excellent flexibility

Cover: Corrugated cover. Black with blue stripe. Synthetic (corrugated finish) . Ozone and oil resistant and flame resistant.

Reinforcement: High tensile textile cords with embedded steel helix wires.

Tube: NBR handles 40% Aromatics

Temperature Range:
-20°C to 121°C

Working Pressure:
5 Bar

3:1 Safety Factor

| Product Code | I.D. mm | Bend Radius | Kg/ MT | Coil/ MT | T-bolt to Suit |
|--------------|---------|-------------|--------|----------|----------------|
| H23-020 | 19 | 115 | 0.418 | 20,60 | 702-029 |
| H23-022 | 22 | 133 | 0.46 | 20,60 | 702-031 |
| H23-025 | 25 | 152 | 0.525 | 20,60 | 702-035 |
| H23-028 | 28 | 172 | 0.576 | 20,60 | 702-039 |
| H23-032 | 32 | 191 | 0.646 | 20,60 | 702-041 |
| H23-035 | 35 | 209 | 0.685 | 20,60 | 702-043 |
| H23-038 | 38 | 229 | 0.737 | 20,60 | 702-047 |
| H23-042 | 42 | 248 | 0.806 | 20,60 | 702-051 |
| H23-045 | 45 | 261 | 0.855 | 20,60 | 702-053 |
| H23-048 | 48 | 286 | 1.005 | 20,60 | 702-057 |
| H23-050 | 51 | 406 | 1.062 | 20,60 | 702-059 |
| H23-057 | 57 | 458 | 1.197 | 20,60 | 702-067 |
| H23-060 | 60 | 482 | 1.233 | 20,60 | 702-070 |
| H23-063 | 63 | 508 | 1.299 | 20,60 | 702-073 |
| H23-070 | 70 | 559 | 1.423 | 20,60 | 702-079 |
| H23-073 | 73 | 590 | 1.48 | 20,60 | 702-082 |
| H23-076 | 76 | 610 | 1.457 | 20,60 | 702-085 |
| H23-090 | 90 | 711 | 1.71 | 20,60 | 702-097 |
| H23-100 | 102 | 813 | 2.054 | 20,60 | 702-112 |
| H23-114 | 114 | 914 | 2.325 | 20 | 702-125 |
| H23-125 | 125 | 1016 | 2.575 | 20 | 702-139 |
| H23-150 | 152 | 1219 | 3.18 | 20 | 702-161 |
| H23-200 | 203 | 1626 | 5.496 | 12 | 702-213 |
| H23-250 | 250 | 2032 | 7.666 | 12 | 702-265 |
| H23-300 | 300 | | 11.365 | 12 | 702-322 |

Hot Air Blower



Recommended Usages:
Suction & delivery of Hot Air applications, corrugated for extra flexibility

Cover:
Corrugated EPDM Rubber

Reinforcement:
High Tensile Nylon Plies with Wire Steel Helix

Tube:
Blended EPDM rubber

Temperature Range:
-20° to +150° C
4:1 Safety Factor

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M11-075 | 76 | 94 | 150 | 3.70 | 20 |

Bulk Material



Recommended Usages:
Delivery of bulk materials - dry & wet slurry

Cover:
Smooth SRB ozone resistant Rubber

Reinforcement:
High Tensile Nylon Plies

Tube:
ABR Rubber

Temperature Range:
-20° to +70° C

| Product Code | I.D. mm | O.D. mm | W.P PSI | Kg/ MT | Coil/ MT |
|--------------|---------|---------|---------|--------|----------|
| M37-100 | 102 | 120 | 87 | 4.00 | 20 |

