


WHIPCHECKS

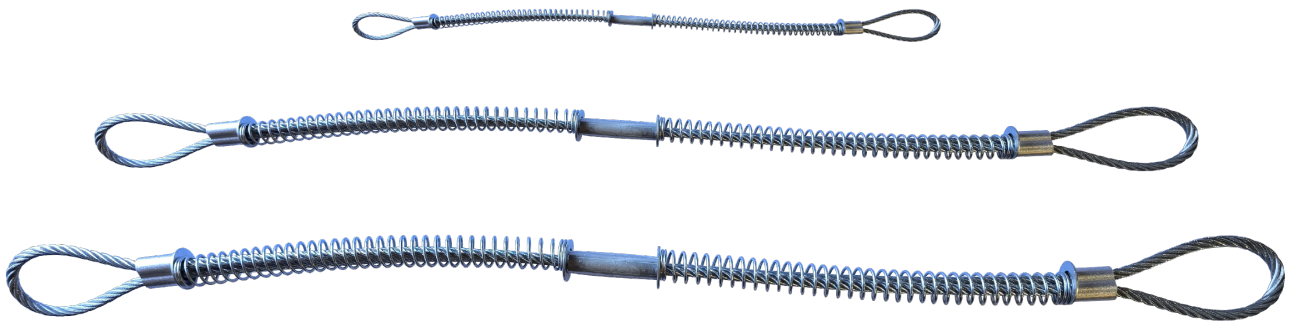

The hose-to-hose connection system enhances safety by preventing injuries associated with broken air hose connections, while its robust rust and corrosion resistance ensures durability. Additionally, its user-friendly design requires no tools for installation or removal, making it both convenient and efficient for various applications.

FEATURES:

- G1570 FC Wire Rope
- 200PSI WP
- Aluminium Crimp Ferrule

Part Number	Size	Cable Size	Hose ID	Breaking Force	Length
800-2390	Small	3mm 6x7	3/8" - 1 1/4"	5.5	510
800-2391	Medium	6mm 6x19	1 1/4" - 2"	18.2	950
800-2392	Large	9.5mm 6x19	2 1/2" - 4"	25.8	1110

TWO EYE HOSE RESTRAINT

Our two eye hose restraints meet essential workplace safety requirements for a variety of industries.

PRODUCT INFORMATION

Two eye hose restraints have two mounting points and a long gripping area to control multidirectional pressure. Each restraint features thimble eyes that are used as shackle points when fitted over the hose.

- Protects the coupling point.
- Prevents hose whipping.
- Reduces risk of injury.
- More cost-effective option.
- Easy to install.

Applications

Use with hydraulic systems or to restrain high pressure hoses dispensing water. Air, sand, steam concrete & other materials.



GALVANISED STEEL - TWO EYE HOSE RESTRAINT

Part Number	Size	Wire size mm	Thimbles mm	Ferrules Top	Ferrules Bottom	Agg. Break Strength kg	Eye Length mm	Grip Length mm	Overall Length mm	Shackle tonne	Weight kg
560-014	6-14mm	1.2	6 (SS)	3.5	2.5	1600	90	330	420	0.75	0.1
560-020	14-20mm	1.2	6 (SS)	3.5	2.5	1600	90	365	455	0.75	0.15
560-030	20-30mm	1.5	6 (SS)	4.5	2.5	2500	115	580	695	1	0.2
560-040	30-40mm	2	8 (SS)	6	3	4200	165	820	985	1	0.5
560-050	40-50mm	2	8 (SS)	6	3	4200	185	900	1085	1	0.6
560-060	50-60mm	2.5	10 (SS)	7	4	7500	230	1220	1450	1.5	1.2
560-070	60-70mm	2.5	10 (SS)	7	4	7500	240	1230	1470	1.5	1.2
560-085	70-85mm	2.5	10 (SS)	7	4	7500	260	1300	1560	1.5	1.35
560-100	85-100mm	3	14 (SS)	9	4.5	10500	300	1600	1900	2	2.4
560-120	100-120mm	3	14 (SS)	9	4.5	10500	390	1715	2105	2	2.8
560-140	120-140mm	4	16 (Galv)	12	6	16000	450	2050	2500	3.2	5.5
560-180	140-180mm	4	16 (Galv)	13	6	20000	500	2800	3300	3.2	8.8
560-220	180-220mm	4	16 (Galv)	13	6	20000	550	3100	3650	3.2	10
560-260	220-260mm	4	16 (Galv)	13	6	20000	550	3500	4050	3.2	11.5
560-300	260-300mm	4	16 (Galv)	13	6	20000	580	3600	4180	3.2	12

316 STAINLESS STEEL - TWO EYE HOSE RESTRAINT

Part Number	Size	Wire size mm	Thimbles mm	Ferrules Top	Ferrules Bottom	Agg. Break Strength kg	Eye Length mm	Grip Length mm	Overall Length mm	Shackle tonne	Weight kg
560-014S	6-14mm	1.2	6	3.5	2.5	1300	90	330	420	0.75	0.1
560-020S	14-20mm	1.2	6	3.5	2.5	1300	90	365	455	0.75	0.15
560-030S	20-30mm	1.6	8	4.5	2.5	2000	115	580	695	1	0.2
560-040S	30-40mm	2	8	6	3	3500	165	820	985	1	0.5
560-050S	40-50mm	2	8	6	3	3500	185	900	1085	1	0.6
560-60S	50-60mm	2.5	10	7	4	6500	230	1220	1450	1.5	1.2
560-70S	60-70mm	2.5	10	7	4	6500	240	1230	1470	1.5	1.2
560-85S	70-85mm	2.5	10	7	4	6500	260	1300	1560	1.5	1.35
560-100S	85-100mm	3.2	14	9	4.5	9000	300	1600	1900	2	2.5
560-120S	100-120mm	3.2	14	9	4.5	9000	390	1715	2105	2	3