


Low Pressure BLUE

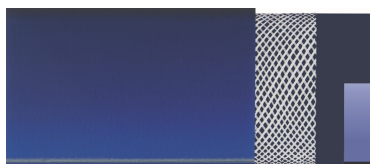

Braided Polyester Yarns plus PVC cover and inner lining extruded for maximum bonding

Colour: Blue

Temperature Range:
-0°C to 65°C

Product Code	I.D. mm	O.D. mm	W.P PSI	B.P PSI	Coil/ MT
C01-038	40	42.7	73	219	100
C01-050	52	54.8	65	195	100
C01-063	65	68.4	58	174	100
C01-075	77	80.6	58	174	100
C01-100	103	107.0	58	174	100
C01-150	153	157.2	44	132	100
C01-200	207	211.8	44	132	100
C01-250	257	262.4	36	108	100
C01-300	308	314.0	30	90	100

Medium Pressure RED



Thicker Braided Polyester Yarns plus PVC cover and inner lining extruded for maximum bonding

Colour: Red

Temperature Range:
-0°C to 65°C

Product Code	I.D. mm	O.D. mm	W.P PSI	B.P PSI	Coil/ MT
C03-038	40	43.6	152	456	100
C03-050	52.5	56.5	152	456	100
C03-063	63	70.2	152	456	100
C03-075	75	82.7	130	390	100
C03-100	100	109.0	130	390	100
C03-150	150	160.4	102	306	100
C03-200	207	213.0	75	225	100

Rapier Fire



High pressure Type 3 fire hose, which is manufactured with an extruded synthetic rubber cover. This extruded cover protects the hose against abrasion and chemical damage. Made from polyester with a synthetic rubber lining and cover. The interior lining and exterior coating on the fire hose jacket is made from PVC nitrile

Product Code	I.D. mm	W.P PSI	B.P PSI	Coil/ MT
C51-038	38	200	540	30
C51-050	50	200	500	30
C51-063	64	200	500	30